



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C11D 17/00, 3/22, 1/94, 3/20, 3/37, 1/66, 1/52, A61K 7/48, 7/06	A1	(11) International Publication Number: WO 99/51716
		(43) International Publication Date: 14 October 1999 (14.10.99)
(21) International Application Number: PCT/EP99/01901 (22) International Filing Date: 22 March 1999 (22.03.99) (30) Priority Data: 9807269.7 3 April 1998 (03.04.98) GB (71) Applicant (for AE AU BB CA CY GB GD GH GM IE IL KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZA ZW only): UNILEVER PLC [GB/GB]; Unilever House, Blackfriars, London EC4P 4BQ (GB). (71) Applicant (for all designated States except AE AU BB CA CY GB GD GH GM IE IL IN KE LC LK LS MN MW NZ SD SG SL SZ TT UG ZA ZW): UNILEVER N.V. [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL). (71) Applicant (for IN only): HINDUSTAN LEVER LIMITED [IN/IN]; Hindustan Lever House, 165/166 Backbay Reclamation, Mumbai 400 020, Maharashtra (IN).		(72) Inventors: ARONSON, Michael, Paul; Unilever Research U.S. Inc., 45 River Road, Edgewater, NJ 07020 (US). BROWN, Charles, Rupert, Telford; Unilever Research Colworth, Colworth House, Sharnbrook, Bedford MK44 1LQ (GB). CHATFIELD, Robert, James; Unilever Research Port Sunlight, Quarry Road East, Bebington, Wirral, Merseyside L63 3JW (GB). FAIRLEY, Peter; Unilever Research Port Sunlight, Quarry Road East, Bebington, Wirral, Merseyside L63 3JW (GB). NORTON, Ian, Timothy; Unilever Research Colworth, Colworth House, Sharnbrook, Bedford MK44 1LQ (GB). WILLIAMS, Jason, Richard; Unilever Research U.S. Inc., 45 River Road, Edgewater, NJ 07020 (US). (74) Agent: MOLE, Peter, Geoffrey; Unilever plc, Patent Dept., Colworth House, Sharnbrook, Bedford MK44 1LQ (GB). (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DETERGENT COMPOSITIONS

(57) Abstract

An aqueous detergent composition, which is in the form of a thickened, mobile fluid, comprising foaming detergent and a polymer or polymer mixture which is capable of forming a reversible gel, which polymer or mixture is present in the composition as a multiplicity of individual gel particles.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

BEST AVAILABLE COPY

gum are described in for example US-A-5151210 and EP-A-500423.

Detergent products containing other polymers have been described, for example in US-A-5286405 and GB-A-2188060.

EP-A-271131 discloses a number of products intended for application to skin which are thickened with carrageenan so as to form gels. Many of these do not include surfactant. One product disclosed in this document is a cleansing composition, containing a low foaming nonionic surfactant.

A number of polymers of biological origin, when in aqueous solution, have the ability to form so-called reversible gels which melt when heated but revert to a gel when cooled down subsequently. One well known example of a polysaccharide which forms reversible gels is agar. An aqueous solution containing a small percentage of agar is a mobile liquid when hot, but when left to cool it forms a gel with sufficient rigidity to maintain its own shape. Other naturally occurring polymers which can form reversible gels are carrageenan, furcelleran, gellan and pectin.

The formation of gels by natural polysaccharides arises from interaction between the polymer molecules. Reversible gels generally display a melting temperature or temperature range, referred to as the gel point. This is the temperature at which, on slow heating, the gel is observed to melt as this interaction largely disappears. Thus, above the gel point, the hot solution of polymer is mobile. When it cools below its gel point, the interaction of polymer molecules enables them to form a continuous and branched network which extends throughout the sample. In contrast

DETERGENT COMPOSITIONS

5 This invention relates to foaming detergent compositions which may be for use in personal washing, or in other applications.

10 A number of detergent products for personal washing are formulated as viscous liquids, creams or gels. Examples of such products are hair shampoos, shower gels and facial washes. Such products generally contain foaming surfactant which usually comprises at least 3wt% of anionic surfactant, possibly accompanied by amphoteric, zwitterionic or nonionic surfactant. It is conventional for such products to contain one or more ingredients whose function is to increase the
15 viscosity of the composition. Some other liquid detergent compositions are also required to contain foaming surfactant and to have a viscosity greater than that of water.

20 One possibility for enhancing the viscosity of a fluid composition is to incorporate a sufficient quantity of electrolyte together with a sufficient quantity of selected surfactant, so that the surfactant is present in a viscous phase, and thus increases the viscosity of the resulting composition.

25

It is also known to incorporate polymeric materials to enhance viscosity. One category of synthetic polymers used for this purpose are crosslinked polyacrylates, for instance those sold under the trade mark Carbopol. Natural polymers
30 have also been used for this purpose, and in particular xanthan gum and its derivatives has been used. Personal washing products, especially shampoos, containing xanthan

BEST AVAILABLE COPY

- 3 -

with the formation of a continuous, branched network, some other materials which thicken water do so through merely local, transient entanglement of molecules. A discussion of polysaccharide gels, including their range of mechanical properties, is found in "Gels and Gelling" by Allan H Clark which is Chapter 5 in Physical Chemistry of Foods, Schwartzberg and Hartel, editors; published by Marcel Dekker 1992. In some instances there is hysteresis and the melting and setting temperatures are not identical.

10

The melting temperature of a gel can suitably be measured by placing a steel ball, having a diameter of approximately 1 mm, on the surface of a sample which is fully set, then raising the temperature slowly e.g. in a programmable water bath. The gel melting point is the temperature at which the ball begins to sink through the sample. Apparatus to facilitate such determinations is available, for example a Physica AMV200 rolling ball viscometer from Anton Paar KG.

15

A reversible gel also displays a transition temperature at which, upon slow temperature increase, all ordering, be it of microscopical or macroscopical extent, has disappeared completely. This transition temperature (from order to disorder) can be measured by means of differential scanning calorimetry (DSC). The transition temperature of a reversible gel, as measured by DSC, usually approximately coincides with gel melting, observable visually.

25

Although xanthan gum can be incorporated as a thickener in aqueous compositions containing surfactant, the resulting products tend to have a stringy texture and a slimy feel. We have found that the gels formed on cooling of a number of other polymers of biological origin are incompatible with

30

BEST AVAILABLE COPY

- 4 -

foaming surfactants. The surfactant makes the gel unstable and phase separation occurs on cooling or on subsequent storage.

5 EP-A-355908 teaches that polysaccharides which are capable of forming a reversible gel can be used to form viscous, yet mobile, fluid compositions by subjecting the composition to shear while gel formation takes place. The resulting compositions can be termed "shear gels". This document
10 exemplifies a number of products, one of which is named a "cleanser gel" and includes a low foaming nonionic surfactant as an emulsifier.

We have now found that it is possible to form detergent
15 compositions which are shear gels and which include foaming surfactant.

According to the present invention, there is provided an aqueous detergent composition, which has a thickened fluid
20 form, containing foaming surfactant and a polymer or polymer mixture which is capable of forming a reversible gel in water, which polymer is present in the composition as a multiplicity of separate gel particles.

25 In the present specification, the expression "thickened fluid" is used to denote a composition with viscosity greater than that of water.

In order that the gel particles remain stable in the
30 presence of surfactant, it will generally be desirable that the polymer or polymer mixture does not require polyvalent cations in order to form the precursor aggregates that are subsequently capable of intermolecular association leading

BEST AVAILABLE COPY

- 5 -

to formation of a gel network. Consequently it is desirable that the polymer or mixture is capable of forming a reversible gel when dissolved at a sufficient concentration in hot distilled or demineralised water and allowed to cool
5 to an ambient temperature of 20°C.

The composition may consist solely of a continuous aqueous phase and the gel particles therein. However, compositions thickened with gel particles, in accordance with this
10 invention have been found to be very effective at suspending other materials and so a composition of this invention may incorporate suspended particles of a water-immiscible liquid (eg a water-immiscible oil) or of a solid other than polymer gel. The amount of such particles may lie in a range from
15 0.1 to 40% by weight, preferably 0.1 to 25% by weight, more preferably 0.5 to 20% by weight of the composition.

Compositions embodying this invention may be made with viscosities in a wide range. At one extreme, the
20 compositions may be freely mobile, self-levelling and pourable, although thicker than water. On the other hand, they may be made as viscous liquids which can be squeezed from a collapsible container, and yet which are too viscous to pour, except very slowly.

25 They are shear-thinning, which can be a useful property, notably in personal washing compositions, because the user can perceive the product as thick and viscous, and yet find it easy to apply. An advantage of viscous shear gels, as
30 compared to compositions thickened in some other way, is that they are better at retaining the shape which has been squeezed out.

BEST AVAILABLE COPY

- 6 -

If the compositions are heated to a temperature above the melting and transition temperatures, the individual gel particles will melt and will not reform as separate particles on cooling, but this will not be a problem in ordinary use, because reversible gels generally have melting temperatures well above normal room temperatures.

Viscosity of compositions embodying this invention can be measured using the same techniques as are used to measure viscosities of other thickened liquid compositions. One suitable apparatus is the Haake Rotoviscometer, another is the Carri-Med CSL 500 viscometer.

Many compositions of this invention will display a viscosity in a range from 0.1 Pa.s to 100,000 Pa.s at a shear rate of 10 sec^{-1} , measured at 20°C , more preferably a viscosity in the range 0.1 Pa.s to 20,000 Pa.s at a shear rate of 10 sec^{-1} , measured at 20°C , , more preferably a viscosity in the range 0.1 Pa.s to 10,000 Pa.s at a shear rate of 10 sec^{-1} , measured at 20°C , more preferably a viscosity in the range 0.1 Pa.s to 1,000 Pa.s at a shear rate of 10 sec^{-1} , measured at 20°C .

One route for the preparation of the sheared gel particles required for this invention starts with the provision of an aqueous solution of the polymer or polymer mixture, at a temperature above the gel melting temperature (and probably also above its order to disorder transition temperature), then cooling the solution to a temperature below the gel setting temperature, while applying shear to the

BEST AVAILABLE COPY

- 7 -

composition. Generally, the solution will be subjected to shear while cooling from 60°C or above to 25°C or less.

On a small scale, this may be carried out in a beaker with a mechanical stirrer in the beaker, providing vigorous stirring while the contents of the beaker are allowed to cool.

We prefer to carry out the preparation using a scraped surface heat exchanger, which may desirably be equipped to operate under a partial vacuum, to reduce the incorporation of air bubbles into the composition as gel formation takes place.

Another possibility for preparing the gel particles is to form a bulk quantity of the gel and then break this up into small particles, for instance by pumping it through a homogeniser.

The gel particles will typically be of a size which can be seen in a microscope. Usually their mean particle size will lie in a range from 0.1 to 250 μm , and often almost all particles will lie between particle sizes of 0.1 to 300 μm . Preferably the mean particle size is between 0.5 or 1 μm and 200 μm may lie in a range from 10 μm up to 200 μm .

An advantage of gel particles having this particle size, particularly in the context of cleansing compositions, is that the small particles of polymer may enhance cleansing by mechanically breaking up soil on the surface being cleaned. This may be particularly so in the case of topical compositions used for make up removal.

BEST AVAILABLE COPY

- 8 -

Generally it will be desirable to form the gel particles by cooling an aqueous solution of the gel-forming polymer or polymer mixture in the substantial absence of surfactant, and then add surfactant subsequently. An alternative
5 approach is to incorporate surfactant into the aqueous composition before the step of cooling under shear. This is not possible for all gel-forming polymers. We have found that for many polymers gel formation is inhibited by the presence of surfactant, and yet gel particles which have
10 already been formed remain stable if surfactant is added subsequently.

Thus in a second aspect, this invention provides a method of preparing a detergent composition as set forth above which
15 comprises forming a hot, mobile aqueous solution of the polymer or polymer mixture, cooling the solution through its gel temperature, subjecting it to shear during or after cooling, and incorporating foam-forming surfactant possibly before but preferably after cooling through the gel
20 temperature.

A laboratory-scale jacketed mixing vessel with a scraped surface, which we have used successfully is the TK Agi Homo mixer available from Tokushu Kika Kogyo Co Ltd, Japan.

25

Scraped surface heat exchangers and homogenisers are used in the commercial production of margarine and other spreadable foodstuffs and such apparatus may be used to produce compositions of this invention on a larger scale. A
30 discussion of such heat exchangers is given by Härröd in Journal of Food Process Engineering 9 (1986) pages 1-62. Suppliers of such apparatus include Armfield Ltd, Ringwood, Hampshire, England, Contherm Corporation which is a division

BEST AVAILABLE COPY

- 9 -

of the Alfa-Laval Group, USA and APV Projects (Crepaco) Ltd, Crawley, West Sussex, England.

After the formation of gel particles, the addition of foam-
5 forming surfactant or other ingredients, probably as a liquid concentrate but optionally as a solid surfactant or solid and/or melted acid surfactant precursor, can be carried out using conventional mixing apparatus, operating at low shear. Possibly a scraped surface heat exchanger
10 used to form the gel particles can also be used for a subsequent mixing operation, especially if run more slowly, so as to give lower shear. A mixing operation should not be allowed to heat the composition sufficiently to cause melting of the gel particles. If necessary, a composition
15 containing gel particles should be cooled before and/or during any subsequent mixing operation.

In a highly preferred embodiment, compositions according to the invention may comprise relatively high levels of polyol
20 materials, which polyols have been found to confer to the compositions various benefits. These may include benefits in terms of processing, but also benefits in the resultant topical compositions.

25 Materials and procedures useful in this invention will now be described in greater detail by way of example only, making reference to the accompanying drawings, wherein:

Fig 1 is a cross-section of a mixer useful for preparing a
30 shear gel particles on a batch basis,

Fig 2 diagrammatically illustrates apparatus for continuous preparation,

BEST AVAILABLE COPY

- 10 -

Fig 3 diagrammatically illustrates another form of apparatus used in Example 10 and

5 Fig 4 diagrammatically illustrates another form of apparatus used in Example 12.

The apparatus shown in Fig 1 is a TK Agi homo mixer. It has a containing vessel 10 with inner and outer walls spaced
10 apart to allow a coolant to be circulated through the space between them. The vessel has an upper closure 12. A rotor 14 within the vessel is extended through the upper closure 12 and connected to a drive motor 16. The rotor 14 surrounds a central fixed stator 18. Baffles 20,22 project
15 from the rotor and stator respectively. When the rotor is turned the liquid within the vessel 10 is subjected to shear by the movement of the rotor 14 and its baffles 20 relative to the stator 18 and its baffles 22. In addition flaps 24 made of polytetrafluoroethylene projecting from the rotor 14
20 scrape the inner wall of the vessel 10. The upper closure 12 includes provision at 26 for connection to a vacuum pump. Gas tight seals are provided between the rotor 14 and the upper closure 12. Consequently vacuum can be applied to the interior of the vessel 10 through the connection 26.

25

In order to make a composition according the invention using this apparatus, an aqueous solution of the polymer, heated to above its gel temperature, is placed in the vessel. The upper closure 12 is then placed on the vessel and the
30 contents of the vessel are cooled by circulation of coolant through the space between the vessel walls. At the same time the rotor is turned and vacuum is applied to the connection 26 so that cooling of the vessel contents takes

BEST AVAILABLE COPY

- 11 -

place under conditions of shear, while suction through the air outlet 26 prevents formation of gas bubbles.

In consequence, as the contents of the vessel cool to below the gel point, a multiplicity of small gel particles are formed. Once the contents of the vessel have cooled below the gel temperature and these particles have formed, surfactant can be mixed with the vessel contents either by removing the upper closure and adding a liquid concentrate (or optionally a solid surfactant or solid and/or melted acid precursor) of the surfactant to the vessel 10, or by transferring the contents of the vessel 10 and also the surfactant, to a separate mixer.

Fig.2 illustrates a preferred form of apparatus consisting of several individual pieces of equipment connected together by pipework.

A hot aqueous solution of the polymer is prepared and held in a supply vessel T1. It is delivered from this by a suitable pump P1 to a scraped surface heat exchanger A1 which is in the form of a cylinder for through flow of the polymer solution and which is surrounded by a jacket for coolant. Within this heat exchanger is located a large diameter shaft fitted with scraper blades which are spring loaded to hold them against the interior surface of the cylindrical vessel wall. Rotation of this central shaft by a motor applies shear to the polymer solution as it passes through the heat exchanger A1.

As the polymer solution passes through the heat exchanger A1 it is cooled to below its gel temperature under conditions of shear and this leads to the formation of gel particles in

BEST AVAILABLE COPY

- 12 -

a continuous aqueous phase. The resulting composition passes on from heat exchanger A1 to a second heat exchanger A2 which is similar except that it operates at a lower speed. This is used to cool the composition further.

5

The composition then flows on to a mixer C which, like the units A1 and A2 performs heat exchange functions. However, within this C-unit there are stationary baffles projecting inwardly from the heat exchanger walls and a motor driven central, small diameter shaft which carries further baffles that project between the stationary baffles of the cylinder wall. There are no scrapers in this device. Here, the composition is mixed with surfactant solution delivered from a supply vessel T2 by means of a suitable pump P2. The mixture leaving the high speed mixer C is a composition in accordance with the present invention. It may be convenient to cool it by passage through a further scraped surface heat exchanger A3 operating at low speed before the composition is delivered as finished product or packed in containers.

20 The pumps P1 and P2 may conveniently be provided as separate channels of a proportioning piston pump, which is a convenient way to ensure that constant proportions are delivered from each of the tanks T1, T2.

25 Mixing apparatus, pumps and scraped surface heat exchangers used in apparatus as above can be of types which are customarily used in the production of margarine and other edible spreads. Another name for the scraped surface heat exchanger which provides for through flow of the material is a "votator". These pieces of apparatus may be manufactured in a range of sizes extending from small units which can fit on a laboratory bench to full scale production plant.

30 Manufacturers of such apparatus include Armfield Ltd,

BEST AVAILABLE COPY

- 13 -

Cantherm Corporation and APV Projects (Crepaco) Ltd mentioned above.

5 There are two generally preferred processes for preparing shear gel compositions according to the inventions using the above described equipment.

10 In the first, water, polymer, and optionally a polyol compound are added to a main mixer vessel (with or without a static homogenizer), and heated to 90°C under vacuum. The mixture can then be cooled, under vacuum and using a high wall scraper speed, rapidly to 50°C, and then more slowly to 20°C.

15 The composition can then be subjected to a static homogenizer, whilst being warmed to 40°C if need be, whilst surfactant or acid form of the surfactant is added to the top of the mixture. Alternatively, the surfactant can be added by dripping molten surfactant through the hopper
20 contents, which can preferably be under vacuum and high shear from a wall scraper and/or homogenizer.

Following this, the acid form of the surfactant can be neutralized by alkali (such as TEA or KOH) can be added as
25 required through the hopper slowly, with continued high shear from the wall scraper and/or homogenizer. Additional ingredients can then be added at this stage (including any surfactant materials which are to be added by coextrusion or injection), and the composition can then be cooled at room
30 temperature, and perfume and preservatives are then added. The pH is checked and adjusted, and finally any suspended particles which are required are added, optionally whilst

BEST AVAILABLE COPY

- 14 -

the composition is subjected to vacuum and low shear from the wall scraper only, before the composition is discharged.

Alternatively, in place of the steps above prior to the
5 initial cooling to 20°C, a micro rotator line can be used to shear the water, polymer and optionally polyol mixture, and to subsequently cool the mixture from 90°C to 20°C. The resulting polymer shear gel can then be processed according to the remainder of the steps above.

10

Polymer Types

Compositions of this invention contain a polymer or polymer mixture capable of forming a reversible gel. It is
15 desirable that the polymer should be capable of forming a gel without requiring metal salt to be present. (Polymers which require ionic species to be present as a prerequisite for gel formation are apt to be destabilised by surfactant, even if formed as shear gel particles). Generally, this
20 means that such a polymer, dissolved in demineralised water at some concentration between 0.1 and 10% by weight will form a gel on cooling the solution without agitation from an elevated temperature of 90°C to 20°C for 24 hours.

25 In this test of gel-formation, a polymer may or may not form a gel at every concentration in the range from 1 to 10% by weight. With some polymers it might be necessary to use more than 1%. With some polymers, concentrations as high as 10% by weight may not be achievable. Some polymers may form
30 gels without standing for as long as 24 hours.

The polymer or polymer mixture which is capable of forming a reversible gel will usually be of natural origin - and

BEST AVAILABLE COPY

- 15 -

specifically one or more polysaccharides will preferably be used. However, it is possible that the polymer, or one or more polymers in a mixture of polymers might be a chemically modified natural polymer such as a polysaccharide which has been chemically treated to provide or alter substituent groups thereon. It is also conceivable that a polymer mixture might contain a synthetic polymer together with a natural polymer. Usually however, the polymer which is used will include a polysaccharide chain of natural origin.

10

One polysaccharide which may be used is agar, which is of course well known for use as a growth medium for microorganisms in vitro.

15 Agarose is a linear polysaccharide, basically made up from β -1,3 galactose residues alternating with α -1,4 galactose residues. The latter are present as the 3,6-anhydride and are the L-enantiomer.

20 Agaropectin likewise has β -1,3 galactose residues alternating with α -1,4-L-galactose residues, but includes sulphate, pyruvate and/or glucuronic acid residues.

The term agar covers a family of polymers containing agarose and/or agaropectin, ie polymers with backbone structure containing alternating 1,3-D-galactose and 1,4-L-galactose residues.

Agar is extracted from certain species of red seaweed, principally in Japan. A description of agar is given by Tetsujiro Matsushashi as Chapter 1 in "Food Gels" edited by Peter Harris, Elsevier, 1990.

BEST AVAILABLE COPY

- 16 -

Another category of polysaccharide which may be used is the kappa carrageenan. Carrageenans are a class of polysaccharides which occur in some other red seaweed species. They are linear polysaccharides made up from alternating β -1,3- and α -1,4- linked galactose residues. The 1,4-linked residues are the D-enantiomer and sometimes occur as the 3,6-anhydride. Many of the galactose residues are sulphated.

10

A number of carrageenan structures have been described and commercial materials are available which approximate to the ideal structures. However, variations between these structures occur, depending on the source of the carrageenan and treatment of it after extraction.

15

A description of different carrageenan types is given in "Carrageenans" by Norman F Stanley which is Chapter 3 of "Food Gels" mentioned above.

20 Kappa carrageenan is sulphated on the 1,3-linked galactose residues, but not on the 1,4-linked residues. Iota carrageenan is sulphated on both residues. Lambda carrageenan has two sulphate groups on the 1,4-linked residues and one sulphate group on 70% of the 1,3-linked residues.

25

Other types of carrageenan may be used in mixtures with kappa. Aqueous solutions of iota carrageenan exist as reversible gels, but these appear to be self healing. Iota carrageenan can be used to form compositions in accordance with this invention, but the compositions become lumpy during storage because of the self-healing property of iota

30

BEST AVAILABLE COPY

- 17 -

carrageenan gels, and so for this invention it is desirable to use kappa carrageenan or mixtures of kappa and iota.

5 Lambda carrageenan on its own in aqueous solution does not form gels because its higher charge density inhibits association between molecules and consequent structuring in liquids. However, some lambda carrageenan may be included in mixtures with kappa, or may be present as an impurity in commercial supplies of kappa or iota carrageenan.

10

If lambda carrageenan is included in a mixture of carrageenans, the mixture may contain a majority (more than one half of the polysaccharide) of kappa or kappa and iota carrageenan with a minority proportion of lambda

15 carrageenan.

Another polymer which may be used is furcellaran. Furcellaran is similar to kappa carrageenan, but is only partially sulphated on the 1,3-linked galactose residues. A

20 polymer of bacterial origin which may be used is gellan. It is the polymer of a tetrasaccharide repeat unit, containing glucose, glucuronic acid, and rhamnose residues. There is some substitution with acyl groups but these are often removed during production to give a low acyl gellan.

25 Gellans are the subject of Chapter 6 by G R Saunderson in "Food Gels" mentioned above. Another possibility is to use a so-called synergistic gel which relies on the interaction of two polymer types. In general these may be formed from a polysaccharide which is a glucomannan with sequences of

30 mannose residues in its polymer chain, such as locust bean gum or guar gum, and a second polymer which is xanthan or carrageenan.

BEST AVAILABLE COPY

- 18 -

It is possible to include an additional thickening agent, such as a small concentration of xanthan gum, or curdlan, in the composition in addition to the gel particles. This may possibly be added after gel particles have been formed along
5 with the surfactant.

A composition according to this invention will generally contain from 0.1 to 10 wt% of naturally occurring polymer. Normally, at least half the weight of this polymer will be
10 one or more polymers capable of forming a reversible gel on cooling from an elevated temperature to 20°C as a quiescent solution is demineralised water.

Polymer capable of forming a reversible gel may constitute
15 from 0.5 to 10wt% of the whole composition, often from 0.2 or 0.5wt% up to 5 or 8 wt%.

In general, the viscosity of a shear gel composition in accordance with this invention will increase with the
20 concentration of polymer contained in it.

Viscosity will also be affected by the size and shape of the gel particles, which in turn is affected by the conditions used to apply shear during cooling. In general,
25 combinations of variable cooling rates and different rotor speeds during shearing permits the optimisation of particle dispersion smoothness, suspending properties and viscosity, possibly because gel particle shapes can vary between spherical and filamentous forms.

30

BEST AVAILABLE COPY

- 19 -

Non-surfactant electrolyte

Although it is generally desirable that the polymer should be capable of forming a gel without participation of ionic species, some polymers which are capable of forming a gel in distilled or demineralised water nevertheless form gels of greater viscosity if some electrolyte is present. Notably the viscosity of kappa carrageenan gel dispersions is increased by the presence of potassium ions and the viscosity of agar gel dispersions is increased in the presence of calcium ions. Consequently, a polymer solution which is cooled under shear to form gel particles as required for this invention may include electrolyte to enhance the strength of the resulting gel particles. The amount of electrolyte required may be a small percentage of the product, e.g. 1%.

Foaming Surfactant


Compositions of this invention contain at least 3 wt% of a foaming surfactant system, preferably from 5wt% up to 30 wt%. At least half, better at least two-thirds of the surfactant present is preferably selected from anionic, amphoteric or zwitterionic surfactants, or alkylpolyglycosides or alkyl polyhydroxyamides (eg. alkyl glucamides) which are foaming nonionic surfactants. Preferably the composition contains at least 5% anionic surfactant possibly accompanied by amphoteric or zwitterionic surfactant. Conveniently the composition comprises 5 to 25% by weight anionic surfactant, preferably 5-15% anionic surfactant.

BEST AVAILABLE COPY

- 20 -

Ethoxylated alcohols, which are low-foaming nonionic surfactants, may be present as less than half of the surfactant present. Preferably, the amount (if any) of such surfactant is not more than a quarter of the surfactant present.


One type of anionic surfactant which is frequently used in personal washing compositions, and which may be used in compositions of this invention is alkyl ether sulphate of the formula:



where R^4 is alkyl or alkenyl of 8 to 18 carbon atoms, especially 11 to 15 carbon atoms, t has an average value of at least 2.0 and M is a solubilising cation such as sodium, potassium, ammonium or substituted ammonium. Preferably t has an average value of 3 or more.

Other anionic surfactants may be used. Possibilities include alkyl glyceryl ether sulphates, sulphosuccinates, taurates, sarcosinates, acyl isethionates, sulphoacetates, alkyl phosphates, acyl amino carboxylates, acyl lactates and soap. In certain embodiments acyl amino carboxylate surfactants are particularly preferred.


Sulphosuccinates may be monoalkyl sulphosuccinates having the formula:



and amido-MEA sulphosuccinates of the formula:

BEST AVAILABLE COPY

- 21 -



wherein R^5 ranges from C_8 - C_{20} alkyl, preferably C_{12} - C_{15} alkyl and M is a solubilising cation (such as those above).

5


Sarcosinates generally have by the formula $R^5\text{CON}(\text{CH}_3)\text{CH}_2\text{CO}_2\text{M}$, wherein R^5 ranges from C_8 - C_{20} alkyl, preferably C_{12} - C_{15} alkyl and M is a solubilising cation (such as those above).

Taurates are generally identified by the formula

10 $R^5\text{CONR}^6\text{CH}_2\text{CH}_2\text{SO}_3\text{M}$, wherein R^5 ranges from C_8 - C_{20} alkyl, preferably C_{12} - C_{15} alkyl, R^6 ranges from C_1 - C_4 alkyl and M is a solubilising cation (such as those above).

Fatty acyl isethionates have the formula:

15




where R is an alkyl group of 7 to 21 carbon atoms and M is a solubilising cation such as those above.

20

Another class of foaming anionic surfactants are the long chain alkyl carboxylates and alkyl ether carboxylates of general formula:

25



Where M is a monovalent alkali cation such as Na and/or K, or an organic cation such as ammonium, monoethanolammonium or triethanolammonium, a is an integer from 0 to about 7, and R
30 is a straight or branched chain, saturated or unsaturated

BEST AVAILABLE COPY

- 22 -


hydrocarbon group having from about 10 to about 20 carbon atoms.

A further class of suitable anionic surfactants are
 5 monoalkyl phosphate and dialkyl phosphate surfactants, such as for example dioctyl phosphate, as well as ether carboxylate and ethoxylated citrate surfactants.

The anionic detergent included in the composition will
 10 generally be selected to avoid harsh detergent such as primary alkane sulphonate or alkyl benzene sulphonate. The amount, if any, of these is preferably less than 3% of the detergents present.

15 Anionic surfactant may be used jointly with amphoteric/zwitterionic surfactant, notably betaine or sulphobetaine.

Amphoteric/zwitterionic surfactants for use in this
 20 invention will usually comply with an overall structural formula

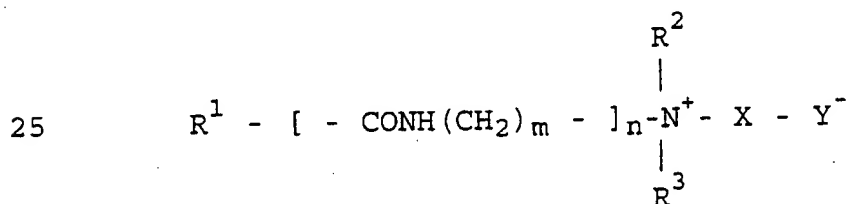

where R^1 is alkyl or alkenyl of 7 to 18 carbon atoms
 30 R^2 and R^3 are each independently alkyl, hydroxyalkyl or carboxyalkyl of 1 to 3 carbon atoms.

m is 2 to 4

n is 0 or 1


BEST AVAILABLE COPY

- 23 -


X is alkylene of 1 to 3 carbon atoms optionally substituted with hydroxyl, and

Y is $-\text{CO}_2^-$ or $-\text{SO}_3^-$

Suitable amphoteric/zwitterionic detergents within the above
5 general formula include simple betaines of formula:

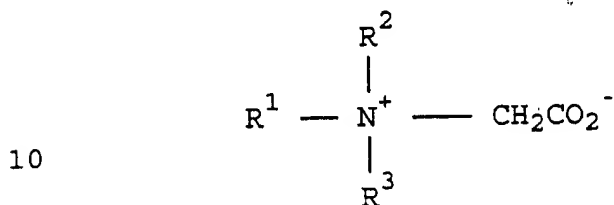

and amido betaines of formula:

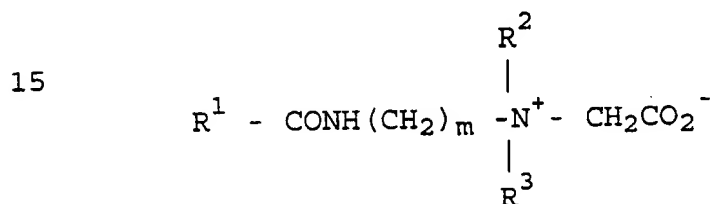


20 where m is 2 or 3.


In both formulae R^1 , R^2 and R^3 are as defined previously. R^1 may in particular be a mixture of C_{12} and C_{14} alkyl groups derived from coconut so that at least half, preferably at
25 least three quarters of the groups R^1 have 10 to 14 carbon atoms. R^2 and R^3 are preferably methyl.

A further possibility is that the zwitterionic detergent is a sulphobetaine of one of the formulae:


- 24 -

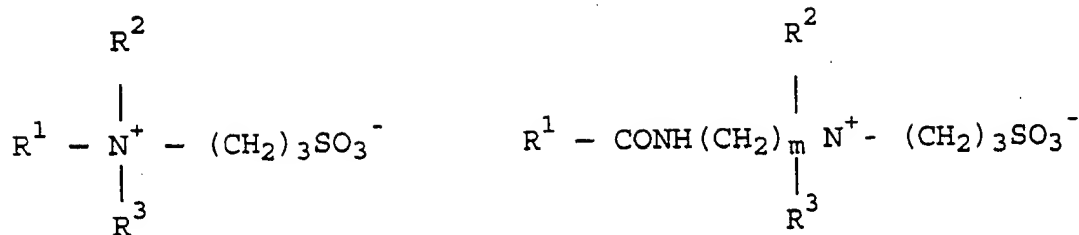

where m is 2 or 3, or variants of these in which -
 $(CH_2)_3SO_3^-$ is replaced by




Another class of amphoteric surfactants are the alkylamide
 alkyl amines, especially the amphotoacetates of general
 formula:



where M is Na, K, ammonium or triethanolammonium, an R is
 branched or straight chain saturated or unsaturated alkyl
 group having about 10 to about 20 atoms.

Glycoside surfactants are nonionic in character and of
 course includes glycoside residues. Suitably they are of
 the general formula :



in which G is a residue of a pentose or hexose, R'O is an
 alkoxy group, x is at least unity and R is an organic
 hydrophobic group from 6 to 20 carbon atoms which is


BEST AVAILABLE COPY

- 25 -

preferably aliphatic, either saturated or unsaturated, notably straight or branched alkyl, alkenyl, hydroxyalkyl or hydroxyalkenyl. Particularly, R may be alkyl or alkenyl of 7 to 14 or 16 carbon atoms.

5

The value of t in the general formulae above is preferably zero, so that the $-(R'O)_t-$ unit of the general formulae is absent. In that case the general formulae become :



If t is non-zero, it is preferred that R'O is an ethylene oxide residue. Other possibilities are propylene oxide and glycerol residues. If the parameter t is non-zero so that R'O is present, the value of t (which may be an average
15 value) will preferably lie in the range from 0.5 to 10.

The group G is typically derived from fructose, glucose, mannose, galactose, talose, gulose, allose, altrose, idose, arabinose, xylose, lyxose and/or ribose. Preferably, the G
20 is provided substantially exclusively by glucose units. Intersaccharide bonds may be from a 1-position to a 2, 3, 4 or 6-position of the adjoining saccharide. Hydroxyl groups on sugar residues may be substituted., e.g. etherified with short alkyl chains of 1 to 4 carbon atoms. Preferably a
25 sugar residue bears no more than one such substituent.

The value x, which is an average, is usually termed the degree of polymerization. Desirably x varies between 1 and 8. Values of x may lie between 1 and 3, especially 1 and
30 1.8.

- 26 -

Alkyl polyglycosides of formula $RO(G)_x$, i.e. a formula as given above in which t is zero, are available from Horizon Chemical Company, BASF and Henkel.

- 5 O-alkanoyl glucosides of formula $RCO_2 - (G)_x$ are described in International Patent Application WO 88/10147 (Novo Industri A/S). In particular the surfactants described therein are glucose esters with the acyl group attached in the 3- or 6-position such as 3-O-acyl-D-glucose or 6-O-acyl-
- 10 D-glucose. Notable are 6-O-alkanoyl glucosides, in which the alkanoyl group incorporates an alkyl or alkenyl group having from 7 to 13 carbon atoms. The glucose residue may be alkylated in its 1-position with an alkyl group having from 1 to 4 carbon atoms, such as ethyl or isopropyl.
- 15 Alkylation in the 1-position enables such compounds to be prepared by regiospecific enzymatic synthesis as described by Bjorkling et al. (J. Chem. Soc., Chem. Commun. 1989 p934).
- 20 Aldobionamides are amides of an aldobionic acid or aldobionolactone. Aldobionic acids are disaccharides or polysaccharides in which the aldehyde group (generally found at the C_1 position of the sugar) has been replaced by a carboxylic acid. Upon drying they cyclise to
- 25 aldobionolactones. The disaccharide may in particular be lactose or maltose, so that the aldobionamide is a lactobionamide or maltobionamide. Further information about aldobionamides and their preparation is given in EP-A-550278.
- 30 Descriptions of alkyl polyhydroxy fatty acid amides are found in US 2965576, EP 220676, EP 550557 and documents

- 27 -

referred to therein. Polyethylene oxide-polypropylene oxide copolymers are marketed commercially, e.g. under the trademark Pluronic .

- 5 The foaming properties of surfactants may be evaluated by a test carried out using a panel of assessors. A suitable number of assessors to provide the panel is 20. Each panellist wears surgical gloves, turned inside out, which are first washed with soap to remove any powder, eg talc,
10 from their surface, and dried. Test solutions are prepared containing 2% by weight of surfactant in demineralised water. To carry out each test, 2.5ml of a test solution is dosed slowly from a syringe directly on to the dry gloves. The panellist then rubs his or her hands together both
15 during and after dosing the surfactant solution onto them, so as to generate a lather. The panellist takes care to avoid dropping solution from the hands. The panellist continues to generate lather by rubbing their hands together for about 10 to 20 seconds until the volume of lather is
20 perceived as constant after which the volume of lather on the gloves is measured by the panellist submersing their hands into a bowl of water while a calibrated collecting funnel is held above them so that the lather is swept off the hands into the collecting funnel. The results obtained
25 from each panellist are averaged.

A surfactant can be designated as a foaming surfactant if the volume of foam obtained is greater than 10 cm^3 . An alternative definition is to state that the volume of foam
30 for a foaming surfactant should be at least half the volume generated from the same volume of an equivalent concentration solution of sodium lauryl ethyl sulphate containing average 3 ethylene oxide residues.

BEST AVAILABLE COPY

- 28 -

A number of surfactants were tested in accordance with the above procedure and the following results were obtained.

Surfactant (2wt% total surfactant)		Geometric mean of foam volumes/cm ³
Trade name	Abbreviation	
Brij 58	C ₁₆ E ₂₀	3.390
Genapol ZRO	SLES	21.500
Dehyton K	CAPB	35.726
Genapol ZRO with Dehyton K	SLES/CAPB (13:2 weight ratio)	19.303
Plantaren 2000 UP	APG	47.705
Genapol ZRO with Dehyton K and Brij 58	SLES/CAPB/C ₁₆ E ₂₀ (13:2:5 weight ratio)	14.815
Jordapon CI with Dehyton K	SCI/CAPB (13:2 weight ratio)	27.667

5

Brij 58, supplied by ICI, is C₁₆ fatty alcohol ethoxylated with average 20 ethylene oxide residues (C₁₆E₂₀).

10 Genapol ZRO, supplied by Hoechst, is sodium lauryl ether sulphate containing average 3 ethylene oxide residues (SLES).

Dehyton K, supplied by Henkel, is coconut amidopropyl betaine (CAPB).

15

Plantaren 2000 UP, supplied by Henkel, is an alkyl poly glucoside in which the alkyl chain has average 10 carbon atoms and the molecules contain an average of 1.4 glucoside

BEST AVAILABLE COPY

- 29 -

residues. Jordapon CI, supplied by PPG Mazer, is sodium cocoyl isethionate (SCI).

5 In a preferred embodiment the composition contains relatively high levels of polyol materials. Typically, polyol compounds may be present at levels of up to 90% by weight, more typically 2-60% by weight, more preferably 5-50% by weight, even more preferably 10-45% by weight of the composition.

10 Suitable polyol materials include glycerol, sorbitol, hexanetriol, propan-1,2 diol, 1,3 butylene glycol, hexylene glycol and propylene glycol, as well as polyethylene glycols and polypropylene glycols. Suitable polyethylene and
15 polypropylene glycols typically have a molecular weight in the region 100-4000, more preferably 200-2000. A preferred polyol material is glycerol.

20 The inclusion of a polyol material in compositions according to the invention has been found to provide a variety of benefits. In the first instance, compositions according to the invention which contain relatively high levels of polyols have been found to have improved stability when subjected to freeze/thaw stability test cycling. In
25 addition, compositions containing high levels of polyols have been found to have relatively good integrity, in particular in terms of their viscosity and their ability to suspend particles.

30 Compositions containing polyols may also have improved clarity, in particular as the need to provide more direct structuring of the product (for example by using clays or carbomer polymers) is reduced. The inclusion of high levels

BEST AVAILABLE COPY

- 30 -

of polyols may also facilitate the inclusions and gelling of benefit agents in the composition. Also, the inclusion of high levels of polyol, together with the use of the polymer or polymer mixture may provide surprising improvements in foam stability creaminess of lather.

Further, the use of relatively high levels of polyols has been found to reduce the reliance of the system on co-structurants (such as clays) with the polymer or polymer mixture. Hence, it has been found that such compositions may have a reduced need for water in the system, since less water is required for hydration of the co-structurant, which in practice increases the options to the skilled practitioner in terms of the surfactant systems which may be used or accommodated in the composition.

The use of high levels of polyols in systems has also been found to be advantageous from a processing perspective, since as is mentioned elsewhere in the application, it is desirable that surfactants are added to the polymer mixture after it has been formed and cooled, to avoid phase separation. The addition of relatively high levels of polyols can result in the shifting of the phase boundary for the composition, meaning that low viscosity isotropic liquids may form. These are relatively easy to process compared to the high viscosity liquid crystal phases (such as H1 or cubic) which can otherwise form in certain circumstances.

Other materials may be included in compositions of this invention. Possibilities include colouring agents, opacifying agents, organic polymers, perfumes including

BEST AVAILABLE COPY

- 31 -

deodorant perfumes, bactericidal agents to reduce the microflora on skin, antioxidants and other preservatives.

5 Compositions according to the invention can optionally contain a benefit agent. The benefit agent can be an emollient oil by which is meant a substance which softens the skin (stratum corneum) directly or by increasing water content and keeping it soft by retarding decrease of water content.

10

Suitable emollients and benefit agents include:

- 15 (a) silicone oils, gums and modifications thereof such as linear and cyclic polydimethylsiloxanes; amino, alkyl alkylaryl and aryl silicone oils;
- (b) fats and oils including natural fats and oils such as jojoba, soybean, rice bran, avocado, almond, olive, sesame, persic, castor, coconut, mink oils; cacao fat; beef tallow, lard; hardened oils obtained by
20 hydrogenating the aforementioned oils, and synthetic mono, di and triglycerides such as myristic acid glyceride and 2-ethylhexanoic acid glyceride;
- (c) waxes such as carnauba, spermaceti, beeswax, lanolin and derivatives thereof;
- 25 (d) hydrophobic plant extracts;
- (e) hydrocarbons such as liquid paraffins, vaseline, petrolatum, microcrystalline wax, ceresin, squalene, pristan and mineral oil;
- (f) higher fatty acids such as lauric, myristic, palmitic,
30 stearic, behenic, oleic, linoleic, linolenic, lanolic, isostearic and poly unsaturated fatty acids (PUFA);
- (g) higher alcohols such as lauryl, cetyl, stearyl, oleyl, behenyl, cholesterol and 2-hexydecanol alcohol;

- 32 -

- (h) esters such as cetyl octanoate, myristyl lactate, cetyl lactate, isopropyl myristate, myristyl myristate, isopropyl palmitate, isopropyl adipate, butyl stearate, decyl oleate, cholesterol isostearate, glycerol monostearate, glycerol distearate, glycerol tristearate, alkyl lactate, alkyl citrate and alkyl tartrate;
- (i) essential oils such as mentha, jasmine, camphor, white cedar, bitter orange peel, ryu, turpentine, cinnamon, bergamot, citrus unshiu, calamus, pine, lavender, bay, clove, hiba, eucalyptus, lemon, starflower, thyme, peppermint, rose, sage, menthol, cineole, eugenol, citral, citronelle, borneol, linalool, geraniol, evening primrose, camphor, thymol, spirantol, penene, limonene and terpenoid oils;
- (j) lipids such as cholesterol, ceramides, sucrose esters and pseudo-ceramides as described in European Patent Specification No. 556,957;
- (k) vitamins such as vitamin A and E, and vitamin alkyl esters, including those vitamin C alkyl esters;
- (l) sunscreens such as octyl methoxyl cinnamate (Parsol MCX) and butyl methoxy benzoylmethane (Parsol 1789);
- (m) phospholipids;
- (n) antimicrobial agents;
- (o) hydroxy acids such as alpha and beta hydroxy acids;
- (p) cationic polymers to condition skin or aid skin benefit agent deposition; and
- (q) mixtures of any of the foregoing components.
- A particularly preferred benefit agent is silicone, preferably silicones having viscosity greater than about 50,000 centipoise. One example is polydimethylsiloxane having visocosity of about 60,000 centistokes.

BEST AVAILABLE COPY

- 33 -

The benefit agent may typically be present in compositions according to the invention at levels of 0.1-20% by weight.

5 Example 1

A number of compositions were prepared containing carrageenan together with surfactant. The carrageenans which were used are set out in the following table.

10

Material Name	Trade Name	Supplier
Kappa carrageenan	Genugel X0909	Hercules
Iota carrageenan	Genuviso X0908	Hercules
Lambda carrageenan	Genugel X-3948	Hercules

Two surfactants were used:

15 Sodium lauryl ether sulphate, average 3EO, (SLES) and coconut amidopropyl betaine (CAPB) supplied by Goldschmidt as Tegobetaine CK.

The surfactants were used in a constant ratio of 13 parts SLES to 2 parts CAPB. The general method of preparation was
20 to dissolve the surfactants in demineralised water to make up a concentrated solution (25% wt surfactant) at 60-70°C. The polymer in powdered form was dissolved in demineralised water at 90-100°C. Appropriate quantities of the two
25 solutions were then mixed to form a solution containing 10% wt surfactant and a chosen concentration of polymer. Electrolyte was added to this solution. The mixed solution was placed in the vessel of a TK Agi Homo mixer as described

BEST AVAILABLE COPY

- 34 -

earlier with reference to Fig 1. This mixer was run at 100 rpm, while the composition was cooled in the mixer from 75°C to 20°C over a period of 60 minutes.

- 5 The compositions prepared are set out in the following table:

No	Kappa (wt%)	Iota (wt%)	Lambda (wt%)	KCl (wt%)	CaCl ₂ (wt%)	Propan-1,2-diol (wt%)
1	1.5	-	-	0.26	-	-
2	2	-	-	0.26	-	-
3	2.5	-	-	0.26	-	-
4	3	-	-	0.26	-	-
5	4.6	-	-	0.26	-	5
6	2	-	-	0.50	-	-
7	1	1	-	0.26	0.62	-
8	2	0.3	-	0.26	-	-
9	2	-	0.3	0.26	-	-
10	2	-	0.6	0.26	-	-
11	2	-	1	0.26	-	-

- Comparison of samples 1 to 5 show a small but progressive increase in viscosity with kappa concentration up to 3% kappa. At 4.6% kappa, the system is stiff and paste-like, but still spreads easily on rubbing (the propan-1,2-diol was added to the surfactant stock solution to allow greater concentrations to be used without forming hexagonal phase).
- 15 Increasing the concentration of KCl to 0.5% (sample 6), to

BEST AVAILABLE COPY

- 35 -

increase gel strength, does not appear to result in a more viscous system.

5 Samples 7 and 8, containing some iota carrageenan, had similar properties to sample 2 but were somewhat more elastic as a consequence of their iota carrageenan content.

The effect of lambda (samples 9, 10 and 11) is to enhance smoothness but without greatly influencing viscosity.

10

A quantity of the shear gel of sample 4 containing 3 wt% kappa carrageenan was reheated to 70°C and then allowed to cool to room temperature without agitation. The result was a rigid gel, indicating that the mobility of the composition
15 formed under shear must be attributed to transformations of the carrageenan solution into small particles of gel during cooling.

Example 2

20

Samples 4, 8 and 10 from the previous example were packed in 150ml translucent polyethylene tubes with 1.5 mm diameter outlets.

25 These samples were assessed by 24 female panellists who were instructed to observe the visual appearance and flow of the products in the tube, then squeeze some of the composition from the tube onto a transparent plastic sheet and make a visual observation of the product, then feel the product
30 with their finger tips. Subsequently they were asked to wash their forearms using each of the products. As a comparison the panellists were provided with a conventional

BEST AVAILABLE COPY

- 36 -

shower gel in which surfactant was thickened by incorporation of salt.

The panellists generally commented that the products of this invention were less sticky or stringy than the control composition and that when dispensed from the tube the dispensed material was less prone to slump under its own weight. (That observation can be attributed to the strongly shear-thinning character of the products of the invention.) When used for washing, the products of the invention were perceived as clean rinsing i.e. they were observed to leave little or no residue or tackiness on the skin after drying.

Example 3

15

Agar shear gels were prepared. The agar was "Deltagar LTS" from Quest International's facility at Kilnagleary, Carriglane, Co. Cork, Ireland. Xanthan, supplied as "Keltrol F" by Kelco was also used. The agar or mixture of agar and xanthan was dissolved in demineralised water and cooled from 75°C to 20°C. The concentrations of polymers, and the viscosities of the resulting compositions were:

Agar (wt%)	Xanthan (wt%)	Viscosity at 10^{-1} sec (mPa.s)	Approx bead diameter (μ m)
1	-	1800	100 - 200
2	-	3000	50 - 150
2	0.05	5000	50 - 100
4	-	18000	10 - 30

25 The compositions were examined under a microscope. Gel beads, of approximate size indicated in the table, were

BEST AVAILABLE COPY

- 37 -

observed. At 1% and 2% agar, the beads could be seen to have small filaments projecting from them.

5 Inclusion of the small concentration of xanthan led to the formation of slightly smaller beads with fewer filaments projecting from them. The composition was notably smoother and less viscous.

10 Compositions containing 2% and 4% agar were mixed with concentrated aqueous solutions of surfactant (25 wt%) in proportion to give a composition containing 10 wt% surfactant (13:2 SLES:CAPB as in Example 1). Mixing was carried out in a beaker, at 20°C using a paddle stirrer turned by an overhead motor at sufficiently low speed to
15 avoid incorporating bubbles.

Example 4: Shower gel

A shower gel was made in the following way using apparatus
20 generally shown in Fig 2, but without heat exchanger A3. Agar, calcium chloride, potassium sorbate and sorbic acid were dissolved in hot water (>90°C) using a Silverson stirrer. The resulting hot agar solution (M) was transferred to tank T1 which was a 5 litre jacketed tank
25 fitted with a bottom stirrer, baffle and hermetically sealing lid and maintained at 95°C. It was stored in this tank for 30 min. A surfactant mixture was made by diluting two parts of a 70% active sodium lauryl ether sulphate (SLES) (Manro BES) paste with one part of propylene glycol
30 to form a 46.7% active surfactant solution. To this solution was added 100% active cocoamido propyl betaine (Tegobetaine CK) (CAPB) in an amount to achieve a ratio of 13 parts SLES to 2 parts CAPB. Colourants, perfume and antioxidant were

BEST AVAILABLE COPY

- 38 -

added as desired and the final surfactant solution (N) transferred to tank T2 which was a second jacketed, stirred 5 litre tank maintained at 30°C. Aeration of the mix was avoided by limiting the stirrer speed to <60 r.p.m. The compositions of the solutions (M) and (N) are set out in the following table together with the compositions containing a total of 16% surfactant.

COMPOSITIONS - EXAMPLE 4			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	4.50	-	3.00
Potassium sorbate	0.10	-	0.07
Sorbic acid	0.40	-	0.28
Calcium Chloride 2H ₂ O	3.38	-	2.30
SLES (pure)	-	43.28	13.867
CAPB (100% active)	-	6.68	2.133
Pigments	-	0.00447	0.003
Propylene glycol	-	13.65	9.29
De-ionised water	91.62	36.39	69.06

10 A microvotator line with layout as illustrated by Fig 2 contained the jacketed tank T1, connected to one channel P1 of a proportioning piston pump and thereafter to two scraped surface heat exchangers A1 and A2, each of about 15 ml volume arranged in series. The jacketed feed tank T2, was

BEST AVAILABLE COPY

- 39 -

connected to a second channel P2 of the proportioning pump and thence to one end of a pinned crystallising mixer C of about 150 ml volume. Jacket temperatures of these units were controlled by glycol, heated or cooled by appropriately sized circulating baths.

Hot water (95°C) was pumped through the votator line to pre-warm the units and feed lines. Agar solution (M) was then pumped through the line with the pump P1 set at 100% until a shear gel was formed. This material was either fed to waste or re-worked to the feed tank T1. Meanwhile, surfactant solution (N) was pumped (P2 set at 47%) through the mixer C with its rotor stationary. When full, the rotor of the mixer C was started and set to 500 r.p.m. The shear gel formed from solution (M) was fed to a port located centrally in the barrel of the mixer C. The shower gel thus formed has a composition as set out in the table above under the heading "Product Composition". It was collected from the outlet of the mixer C and packaged in plastic bottles.

Typical run conditions are set out in the following table:

PROCESS CONDITIONS - EXAMPLE 4							
	T1	T2	P1	P2	A1	A2	C
Jacket Temperature °C	95	30	-	-	75	0	30
Product Exit Temperature °C	-	-	56.7	-	69.1	12.9	26
Rotor Speed r.p.m	<60	<60	-	-	1000	2000	500
% Pump Stroke	-	-	100	47	-	-	-

A phase stable, viscous, foaming and essentially transparent shower gel was produced exhibiting a peaking ability (ie shape sustaining character), upon being squeezed from the

- 40 -

bottle. The product had an excellent non-stringy thinning behaviour in use and left the skin feeling smooth but not sticky when dry.

5 Example 5 : Moisturising Shower gel base

A moisturising shower gel was made in a similar way to Example 4. Agar, sodium caseinate, potassium sorbate and sorbic acid were dissolved in hot water ($>90^{\circ}\text{C}$) using a
10 Silverson stirrer. The hot solution was maintained at 90°C in tank T1 for 30 min. prior to use. An oil phase was dispersed in the agar solution using a homogeniser (Crepaco) to achieve average oil droplet sizes of around 1 micron in the resulting emulsion M. A foaming surfactant composition
15 N (approximately 50% active) was placed in a separate tank and maintained at 30°C with slow stirring (<60 r.p.m.). The compositions of the solutions M and N are set out in the following table, together with the composition of the product made from them, which contained a total of 10%
20 surfactant.

The oil droplets remained in suspension in the product composition.

- 41 -

COMPOSITIONS - EXAMPLE 5			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	4.00	-	3.17
Potassium sorbate	0.10	-	0.08
Sorbic acid	0.40	-	0.32
Sodium Caseinate (DMV)	2.00	-	1.60
SLES (pure)	-	43.28	8.667
CAPB (100% active)	-	6.66	1.333
Oil Blend	10.00	-	7.94
Propylene glycol	-	13.65	9.29
De-ionised water	83.50	36.41	67.60

The solutions M and N were processed using the micro-votator line and procedure of Example 4. The run conditions were as set out in the table below. The product was a thick, white, foaming shower gel exhibiting good thinning but non-stringy flow properties in use. It left skin feeling smooth and moist.

PROCESS CONDITIONS - EXAMPLE 5							
	T1	T2	P1	P2	A1	A2	C
Jacket Temperature °C	95	30	-	-	95	5	5
Product Exit Temperature °C	-	-	68.0	-	-	22.9	8.6
Rotor Speed r.p.m	<60	<60	-	-	1000	2000	1000
% Pump Stroke	-	-	100	26	-	-	-

BEST AVAILABLE COPY

- 42 -

Example 6: Moisturising shower gel base

Example 5 was repeated but omitting the emulsifier (sodium caseinate). The product was a stable, thick, white gel. It was essentially non-foaming when initially applied to the skin, behaving more like a cleansing cream but formed copious amounts of foam upon dilution with water during normal washing action, leaving skin feeling smooth and moist. The compositions of solutions M and N and the product are set out in the following table:

COMPOSITIONS - EXAMPLE 6			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	4.00	-	3.17
Potassium sorbate	0.10	-	0.08
Sorbic acid	0.40	-	0.32
SLES (pure)	-	43.28	8.667
CAPB (100% active)	-	6.66	1.333
Oil Blend	10.00	-	7.94
Propylene glycol	-	13.65	9.29
De-ionised water	81.50	36.41	66.03

Example 7: Thick moisturising shower gel base

Example 5 was repeated using a higher agar concentration, with sodium caseinate replaced by gelatin (Bloom 150) and with the addition of calcium chloride to solution M. The

BEST AVAILABLE COPY

- 44 -

Example 8: Hair shampoo base

5 A preparation of very high viscosity and high surfactant active concentration was made containing a typical foaming, hair cleansing surfactant phase so as to permit dilution during further processing into a hair shampoo. As in Example 4, agar was dissolved together with potassium sorbate, sorbic acid and calcium chloride in hot water (>90°C) using a Silverson mixer to form agar solution M.

10

A surfactant mixture was made by diluting two parts of a 70% active sodium lauryl ether sulphate (SLES) (Manro BES) paste with one part of propylene glycol to form a 46.7% active surfactant solution. To this solution was added 100% active
15 cocoamido propyl betaine (Tegobetaine CK) (CAPB) in an amount to achieve a ratio of 13 parts SLES to 2 parts CAPB. Antioxidant was added and the final solution (N) transferred to a feed tank maintained at 30°C. Aeration of the mix was avoided by limiting the stirrer speed to <60 r.p.m. The
20 compositions of solutions M and N and of the high-viscosity composition made from them which contained 24% surfactant, are set out in the following table:

BEST AVAILABLE COPY

- 43 -

surfactant solution N was unchanged. The compositions are set out in the following table:

COMPOSITIONS - EXAMPLE 7			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	4.50	-	3.20
Potassium sorbate	0.10	-	0.08
Sorbic acid	0.40	-	0.32
Gelatin (Bloom 150, Extraco)	0.75	-	0.60
Calcium Chloride 2H ₂ O	2.876	-	2.30
SLES (pure)	-	43.28	8.667
CAPB (100% active)	-	6.66	1.333
Oil Blend	12.502	-	10.000
Propylene glycol	-	13.65	9.29
De-ionised water	81.00	36.41	63.65

- 5 The votator line process conditions were as set out in the following table:

PROCESS CONDITIONS - EXAMPLE 7							
	T1	T2	P1	P2	A1	A2	C
Jacket Temperature °C	95	30	-	-	95	5	5
Product Exit Temperature °C	-	-	64.1	-	69.1	8.7	8.3
Rotor Speed r.p.m	<60	<60	-	-	1000	2000	1000
% Pump Stroke	-	-	100	26	-	-	-

BEST AVAILABLE COPY

- 45 -

COMPOSITIONS - EXAMPLE 8			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	4.5	-	2.25
Potassium sorbate	0.10	-	0.05
Sorbic acid	0.40	-	0.21
Calcium Chloride 2H ₂ O	3.38	-	1.76
SLES (pure)	-	43.28	21.00
CAPB (100% active)	-	6.24	3.00
Pigments	-	0.00	0.00
Propylene glycol	-	13.65	15.00
De-ionised water	91.62	36.83	56.73

The processing of the two solutions was carried out using the micro-votator line design and method of Example 4. The process run conditions are set out in the following table:

5

PROCESS CONDITIONS - EXAMPLE 8							
	T1	T2	P1	P2	A1	A2	C
Jacket Temperature °C	95	30	-	-	75	5	5
Product Exit Temperature °C	-	-	64.1	-	69.1	8.7	8.3
Rotor Speed r.p.m	<60	<60	-	-	500	2500	1000
% Pump Stroke	-	-	100	92	-	-	-

BEST AVAILABLE COPY

- 46 -

Example 9: Carrageenan based surfactant gel

A stable, foaming surfactant gel was made using mixed xanthan and carrageenans. Xanthan (Keltrol F, Kelco International Ltd), pure iota-carrageenan (Genuvisco X-0908, Hercules) and pure kappa-carrageenan (Genugel X-0909, Hercules) powders were dry blended and then dissolved in hot deionised water ($>80^{\circ}\text{C}$) using a Silverson stirrer to which potassium sorbate and sorbic acid were added. The hot solution (M) was transferred to a stirred, jacketed feed tank and maintained at 85°C . A surfactant mixture was made by diluting two parts of a 70% active sodium lauryl ether sulphate (SLES) (Manro BES) paste with one part of propylene glycol to form a 46.7% active surfactant solution. This solution was heated to 60°C and the 100% active cocoamido propyl betaine (Tegobetaine CK) (CAPB) added in an amount to achieve a ratio of 13 parts SLES to 2 parts CAPB. This solution (N) was added to the hot polymer solution M in the feed tank and processed through a micro-votator line comprising feed tank, proportioning pump and a succession of three scraped surface heat exchangers designated A1, A2, A3. The compositions and the process conditions are set out in the following two tables:

BEST AVAILABLE COPY

- 47 -

COMPOSITIONS - EXAMPLE 9			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Kappa carrageenan	1.0		0.80
Iota carrageenan	1.5	-	1.20
Xanthan	0.10	-	0.08
Potassium sorbate	0.20	-	0.05
Sorbic acid	0.40	-	0.21
SLES (pure)	-	43.28	8.67
CAPB (100% active)	-	6.68	1.33
Propylene glycol	-	7.74	6.19
De-ionised water	96.80	42.30	81.47

PROCESSING CONDITIONS - EXAMPLE 9					
	T1	P2	A1	A2	A3
Jacket Temperature (°C)	85	-	-5	0	0
Product Exit Temperature (°C)	-	43.1	9.4	0.7	2.8
Rotor Speed r.p.m	<60	-	2500	1000	1000
% Pump Stroke	-	100	-	-	-

Example 10: Liquid soap

5

The composition of the previous Example was processed in a different way to produce a liquid soap product.

Carrageenans, sorbic acid and potassium sorbate were dissolved in hot water (<80°C) with stirring as before to

BEST AVAILABLE COPY

- 48 -

form solution M which was maintained at this temperature in a stirred tank. Xanthan was dispersed in de-ionised water, heated to 95°C and maintained at this temperature in a second stirred tank T2 (solution X). Surfactant solution (N) was prepared as in Example 6 and held in a third stirred tank T3 at 30°C.

A micro-votator process line as illustrated by Fig 3 was used. It was constructed such that solution X was fed from tank T2 through one end of a mixer C1 while carrageenan solution M was fed from tank T1 to a centrally located port on the same mixer. Cooling and shear-gel formulation took place in this mixer. After passing through a scraped surface heat exchanger A to complete cooling, the mixture was delivered to the centrally located port of a second mixer C2 through which solution N from tank T3 was already flowing.

Processing conditions are set out in the following table:

20

PROCESS CONDITIONS - EXAMPLE 10									
	T1	T2	T3	P1	P2	P3	C1	A1	C2
Jacket Temperature °C	95	95	30	-	-	-	75	5	5
Product Exit Temperature °C	-	-	-	57	-	-	14.4	7.4	10.6
Rotor Speed r.p.m	<60	<60	<60	-	-	-	2000	1000	1000
% Pump Stroke	-	-	-	85	15	43	-	-	-

BEST AVAILABLE COPY

- 49 -

Example 11: Fabric wash liquid base

A foaming surfactant preparation intended for use in machine washing of fabrics was made using a micro-votator line of the type shown in Fig 2 and described in Example 4. Agar, calcium chloride, potassium sorbate and sorbic acid were dissolved in hot water (>90°C) using a Silverson stirrer. The hot solution (M) was transferred to a jacketed tank T1 fitted with a bottom stirrer, baffle and hermetically sealing lid and maintained at 95°C for 30 min. A surfactant mixture was made by diluting a 70% active sodium lauryl ether sulphate (SLES) (Manro BES) paste with propylene glycol and a mixture of non-ionic and anionic surfactants. Colourants, perfume and preservative were added as desired and the resulting solution (N) with composition shown in the table below was transferred to a feed tank T2 maintained at 30°C. Aeration of the mix was avoided by limiting the stirrer speed to below 60 r.p.m. The processing was as in Example 4. The product composition was in the form of an optically clear liquid capable of suspending particles of insoluble solids. It contained a total of 22.9% surfactant.

The compositions and the process conditions are set out in the following two tables:

25

BEST AVAILABLE COPY

- 50 -

COMPOSITIONS - EXAMPLE 11			
Material	Solution M (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Agar (Luxara 1253)	3.00	-	1.24
SLES (pure)	0.0	18.54	10.86
Non-foaming Surfactant mixture	0.0	20.55	12.04
Propylene glycol	-	10.17	5.96
De-ionised water	97.00	50.74	69.90

PROCESS CONDITIONS - EXAMPLE 11							
	T1	T2	P1	P2	A1	A2	C1
Jacket Temperature °C	95	30	-	-	95	0	30
Product Exit Temperature °C	-	-	56.3	-	91.8	18.7	-
Rotor Speed r.p.m	<60	<60	-	-	1000	4000	2000
% Pump Stroke	-	-	70	99	-	-	-

Example 12: Foaming Cleanser

5

This preparation was carried out using a micro-votator line as shown by Fig 4. Gellan (Kelcogel F, Kelco) was dissolved in hot de-ionised water (>90°C) using a Silverson mixer and transferred to a jacketed stirred tank T1 and maintained at

10 90°C with slow stirring (solution M). A solution of calcium

BEST AVAILABLE COPY

- 51 -

chloride was made in de-ionised water and transferred to a second stirred tank T2. The surfactant mixture N of Example 4 was prepared and transferred to a third stirred tank T3. The micro-votator line had the two feed tanks T1, T2

5 connected via separate channels P1, P2 of a proportioning pump to a Tee piece located at the inlet to a first scraped-surface heat exchanger A1 which was followed in sequence by a mixer C1 and two further heat exchangers A2, A3. Finally, the outlet of the last heat exchanger A3 was connected to a
10 centrally located port of a second mixer C2 which was supplied from feed tank T3 via a third proportioning pump channel P3.

The three solutions (M, N and CaCl₂) were processed through
15 this line to form a stable, pourable product containing 16% surfactant which foamed well in use. The compositions and the process conditions are set out in the following two tables:

COMPOSITIONS - EXAMPLE 12				
Material	Solution M (%w/w)	CaCl ₂ Solution (%w/w)	Solution N (%w/w)	Product Composition (%w/w)
Gellan	1.875	-		0.80
Calcium chloride 2H ₂ O	-	2.7		0.50
SLES (pure)	-		43.28	8.67
CAPB (100% active)	-		6.68	1.33
Propylene glycol	-		14.55	9.90
De-ionised water	98.13	97.30	50.04	88.70

20

BEST AVAILABLE COPY

- 52 -

PROCESS CONDITIONS - EXAMPLE 12				
	Jacket Temperature (°C)	Product Exit Temperature (°C)	Rotor Speed (r.p.m)	% Pump Stroke
T1	90	83	<60	-
T2	90	-		-
T3	30	-		-
P1	-	-	-	80
P2	-	-	-	20
P3	-	-	-	47
A1	-15	15	2500	-
C1	0	-	2000	-
A2	0	6.5	1000	-
A3	0	3	1000	-
C2	5	-	1000	-

Example 13-26 - Foaming Cleansers

5

The following compositions were prepared using a water jacket surrounded wall scraping vessel similar to that described in relation to example 1, optionally under vacuum if necessary, in particular where the composition being processed is relatively thick (e.g. has a relatively high agar concentration), or it is particularly required to avoid aeration. The processing conditions were those generally described in relation to example 11, where the agar, water and polyols (eg. glycerol, PEG 400, propan-1,2 diol) and ethanol were prepared as a presolution, being mixed using a Silverson stirrer before being transferred to a jacketed tank T1 and being maintained at 95°C. The remainder of the components, except the perfume and preservative, are then

BEST AVAILABLE COPY

- 53 -

formulated with the surfactants and processed as described in relation to example 11.

Example (% w/w)						
Material	13	14	15	16	17	18
Agar (Luxara 1253)	0.3	0.3	0.3	0.1	0.3	1.3
Cocoyl Sarcosinic acid	3.7	3.7	3.7	--	--	--
N-cocoyl DL-Alanic acid	3.8	3.8	3.8	--	3.5	--
Lauric acid	6.6	6.6	6.6	8.8	10.0	--
Cocoamide monoethanolamine	1.9	1.9	1.9	2.5	--	--
Triethanolamine	5.0	5.0	5.0	--	13.4	6.7
PEO(150) PPO (30) poloxamer	10.0	10.0	10.0	10.0	10.0	--
Glycerol	14.0	14.0	14.0	14.0	14.0	54.0
PEG 400	14.0	14.0	14.0	14.0	14.0	3.5
1mm mineral oil capsules	1.0	--	--	1.0	1.0	--
10-25µm polyester fibres	--	1.0	--	--	--	--
Opacified (TiO ₂) agarchop gel	--	--	1.0	--	--	--
Perfume	0.1	0.1	0.1	0.1	0.1	0.1
Kathan CG	0.05	0.05	0.05	0.05	0.05	0.04
Potassium cocoyl glycinate	--	--	--	8.8	--	--
Potassium hydroxide	--	--	--	4.9	--	--
C ₉ -C ₁₅ mono/di alkyl phosphoric acid	--	--	--	--	7.0	--
Cocoyl glutamic acid	--	--	--	--	--	11.8
Myristyl glutamic acid	--	--	--	--	--	4.0
POE sorbitan triisostearate	--	--	--	--	--	1.4
Water	To 100	To 100	To 100	To 100	To 100	To 100

BEST AVAILABLE COPY

- 54 -

Example (% w/w)								
Material	19	20	21	22	23	24	25	26
Agar (Luxara 1253)	4.5	1.0	1.0	3.0	3.0	2.0	1.3	2.0
Potassium cocoyl glycinate	18.0	18.0	6.0	--	--	18.0	11.7	18.0
Glycerol	16.0	50.0	90.0	--	14.0	--	9.1	--
PEG 400	16.0	--	--	--	14.0	--	9.1	--
Perfume	0.1	0.1	--	0.1	--	--	--	--
Kathan CG	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
1mm mineral oil microcapsules	--	0.4	--	--	--	--	--	--
C ₉ -C ₁₅ mono/dialkyl phosphoric acid	--	--	--	12.4	12.4	--	--	--
C ₁₂ /C ₁₄ alkyl (4EO mono Alkyl ether citrate	--	--	--	2.6	--	--	--	--
Potassium hydroxide	--	--	--	6.0	6.0	--	--	--
Propan-1,2 diol	--	--	--	28.0	--	--	--	--
Lauryl (10EO) ether carboxylic acid	--	--	--	--	2.9	--	--	--
Precipitated silica	--	--	--	--	3.0	--	--	--
Phoenix 3000 opt FW	--	--	--	--	--	0.1	0.1	--
Ethanol	--	--	--	--	--	--	35.0	35.0
Neosorb 70/70 (70% sorbitol solution)	--	--	--	--	--	To 100	--	--
Water	To 100	To 100	To 100	To 100	To 100	--	To 100	To 100

In compositions 25 and 26, ethanol was posted added to the
5 shear gel.

In certain embodiments including relatively high (e.g
greater than about 5%, possibly greater than about 20%) of
short chain monohydric alcohols such as ethanol, it is
10 possible to manufacture the shear gel in the presence of the
alcohol without the surfactant, and then subsequently post-
dosing the surfactant to provide the final composition.
This provides a way of manufacturing compositions containing
relatively high levels of short chain monohydric alcohols,
15 which compositions may otherwise be relatively difficult to
make.

BEST AVAILABLE COPY

- 55 -

Various benefits were found to be associated with aspects of the above compositions. For example, the compositions which contained potassium cocoyl glycinate were found to have good clarity and be very shear thinning suitable for direct application to eg. the face. Also, various of the compositions were found to have the surfactant in isotropic solution in a temperature range of 5-45°C, in which case the viscosity of the product is governed solely by the shear gel particles. In those instances, the viscosity is relatively unaffected by temperature, which facilitates the packaging of the product, making it for example suitable for distribution in tubes.

Also, compositions comprising relatively substantial levels of polyols are found to be tolerant of the coextrusion or injection into them of surfactant during manufacturing, and certainly more so than systems which were structured by eg. clay or Carbopol^(). It was also found that the incorporation of polyols tended to affect the gelation rate and mechanism, with the result that a relatively mild shearing regime could be used to generate the shear gels, and preventing the formation of hard gel clumps in unsheared parts of the mixer on cooling. Compositions containing the polyols also tended to suffer reduced levels of syneresis

Examples 27-32

The following additional face wash compositions were prepared.

In the manufacturing method a thermostatically controlled wall heater vessel was used, together with a wall scraping paddle. The vessel was evacuated to prevent air entrapment.

BEST AVAILABLE COPY

- 56 -

- Into the vessel was charged water, polyol and agar to provide a pre-solution. This mixture was heated with stirring to 90°C. The resulting solution was then cooled to 50°C with rapid paddle mixing. The mixture was then further cooled to 25°C with slow cooling, and rapid paddle mixing, in order to form the shear gel. Into the shear gel was added the solid surfactant, which was dissolved by warming the composition to 40°C and gently mixing.
- 10 The composition was then cooled, any perfume, preservatives and whitening agent were added, and the composition discharged.

The compositions contain relatively high levels of polyol materials.

Component	% w/w					
	Example 27	Example 28	Example 29	Example 30	Example 31	Example 32
Water	38	38	28	32.8	28	28
Glycerol	40	40	40	40	40	40
Agar	2	2	2	2	2	2
Potassium Cocoglutamate	20	19.8	20	18	17.8	17.8
PEG 400	--	--	10	5	--	10
Perfume	--	0.15	--	0.15	0.15	0.15
Preservative	--	0.05	--	0.05	0.05	0.05
Whitener	--	--	--	2	2	2
PEG 1500	--	--	--	--	10	--

Examples 33 40 represent further suitable compositions according to the invention.

BEST AVAILABLE COPY

- 57 -

Material	% w/w							
	33	39	35	36	37	38	39	40
Agar	3.2	3.2	3.2	3.2				3.2
Iota Carageenan					1.2	1.2	1.2	
Kappa Carageenan					0.8	0.8	0.8	
SLES (as 100%)	10	10	10		8	3	6	10
CAPB (as 100%)	3	3	5	2	2	5		4
Sodium lauryl isethionate		2		3		3	2	2
Lauryl amphotetate			3	2				3
Potassium laurate				12				
Potassium myristate					6			
Jaguar 13 S		0.5	1.2	0.7	0.4	0.3		0.8
Petrolatum		13						
Sunflower seed oil							10	20
Polydimethyls iloxane	5	5						3
Glycerol	3	22		5				
Parsol MCX			6			3		
Parsol 1789			2			1		
Water to 100%								

BEST AVAILABLE COPY

- 58 -

Claims

1. An aqueous detergent composition, which is in the form of a thickened, mobile fluid, comprising foaming
5 detergent and a polymer or polymer mixture which is capable of forming a reversible gel, which polymer or mixture is present in the composition as a multiplicity of individual gel particles.
- 10 2. A composition according to claim 1 wherein the gel particles have a particle size of less than 200 microns.
- 15 3. A composition according to claim 1 wherein the foaming detergent comprises surfactant selected from anionic, amphoteric and zwitterionic surfactants.
- 20 4. A composition according to claim 3 containing at least 3 wt% anionic surfactant.
- 25 5. A composition according to claim 3 containing 5 to 25 wt% anionic surfactant.
6. A composition according to any of claims 3 to 5 containing anionic surfactant with a lesser quantity of
25 zwitterionic surfactant.
7. A composition according to any of claims 1-6 additionally comprising a polyol material.
- 30 8. A composition according to claim 7, wherein the polyol material is selected from glycerol, sorbitol, hexandiol, propan-1;2 diol, 1,3 butylene glycol,

BEST AVAILABLE COPY

- 59 -

propylene glycol, hexylene glycol, and polyethylene glycols and polypropylene glycols having molecular weights in the range 100-4,000.

- 5 9. A composition according to claim 7 or claim 8 wherein the polyol material is present in the composition at a level of 2-90% by weight.
- 10 10. A composition according to any one of claims 1 to 9 wherein the foaming surfactant contains nonionic surfactant selected from alkyl glycosides, O-alkanoyl glycosides, polyethylene oxide-polypropylene oxide block copolymers, alkyl polyhydroxyamides, alkyl aldobionamides and mixtures thereof.
- 15 11. A composition according to any one of the preceding claims wherein the polymer or polymer mixture comprises kappa carrageenan.
- 20 12. A composition according to any one of the preceding claims wherein the polymer or polymer mixture comprises agar.
- 25 13. A composition according to any one of the preceding claims which contains from 0.1 to 10 wt% of the polymer or polymer mixture.
- 30 14. A composition according to any one of the preceding claims including suspended particles of a liquid or solid other than polymer gel.
15. A method of preparing a detergent composition according to any one of claims 1 to 14 which comprises forming a

BEST AVAILABLE COPY

- 60 -

hot, mobile aqueous solution of the polymer or polymer mixture cooling the solution through its gel temperature while subjecting it to shear, and incorporating foam-forming surfactant before or after cooling.

- 5
16. A method according to claim 15 wherein the surfactant is added to the solution after cooling to 35°C or less.
- 10 17. A method according to claim 16 wherein the polymer or polymer mixture comprises kappa carrageenan and the surfactant is present in the aqueous solution while it is cooled under shear.
- 15 18. A composition according to claim 14, wherein the suspended phase is selected from silicone oils or gums, triglyceride oils or waxes, mineral oil, petrolatum, polyethylene and mixtures thereof.
- 20 19. A composition according to claim 14 wherein the suspended particle is a sunscreen.

BEST AVAILABLE COPY

Fig.1.

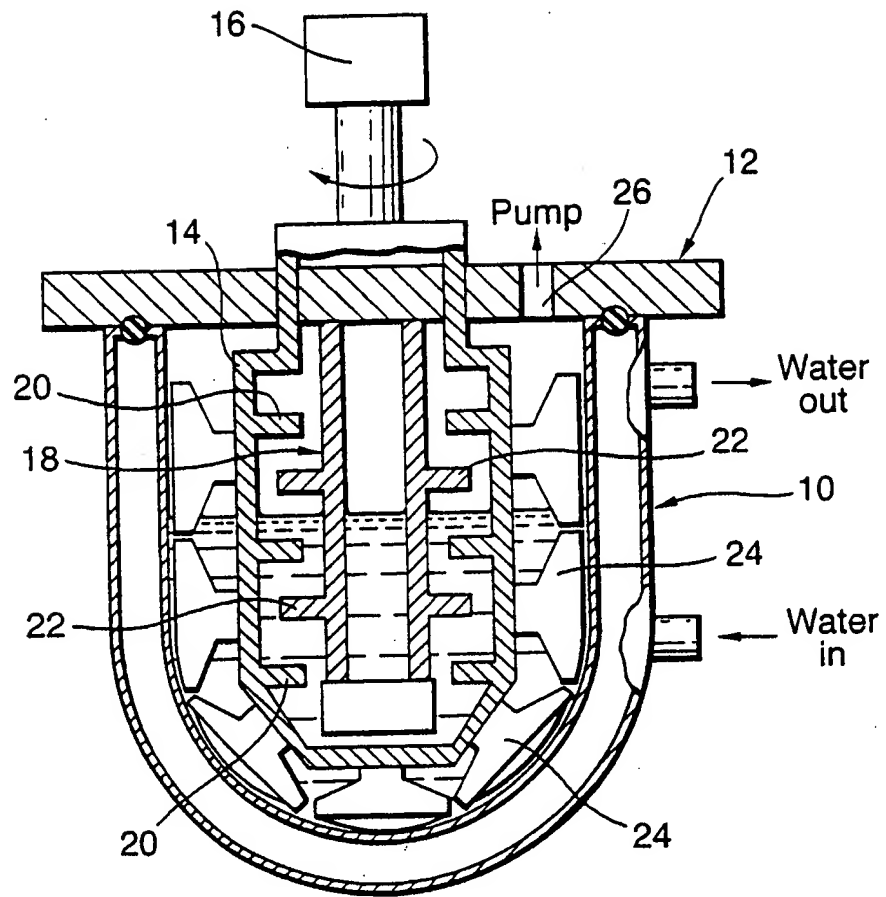


Fig.2.

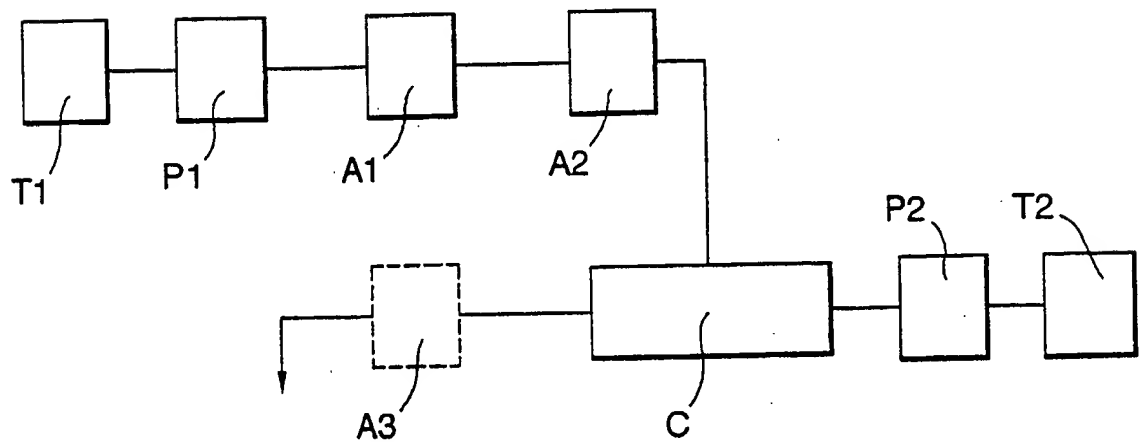


Fig.3.


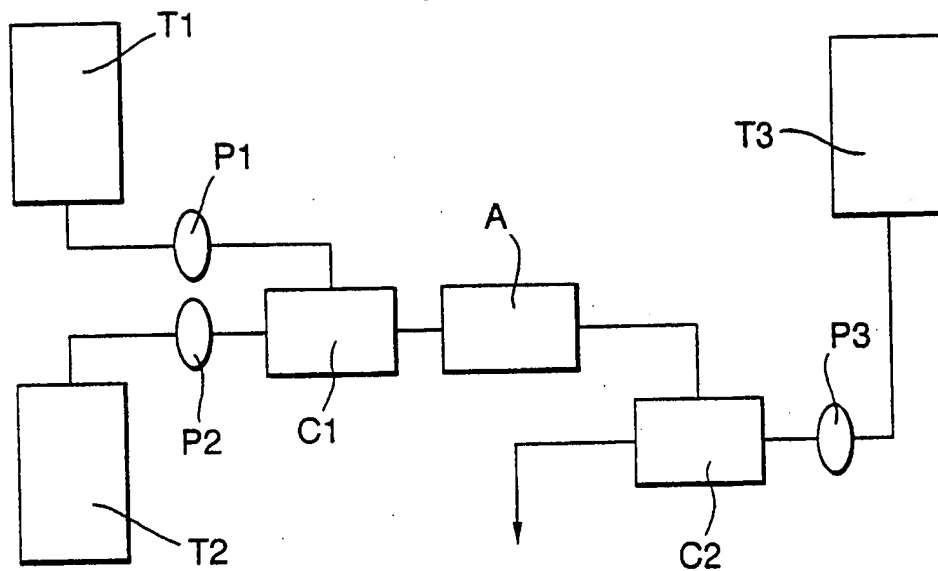


Fig.4.

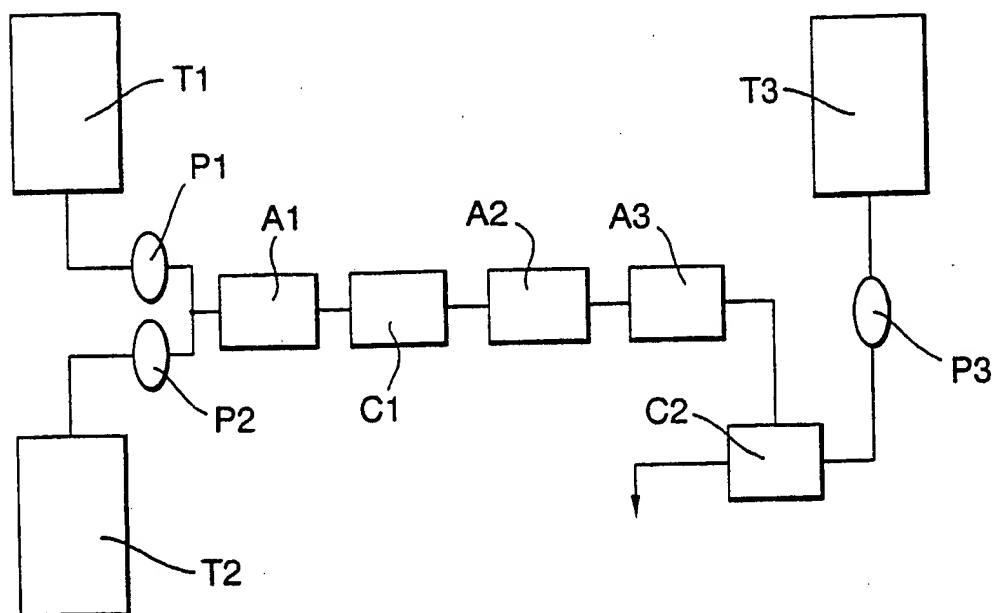

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/01901

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C11D17/00 C11D3/22 C11D1/94 C11D3/20 C11D3/37
C11D1/66 C11D1/52 A61K7/48 A61K7/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C11D A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category ²	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 08601 A (UNILEVER PLC ; UNILEVER NV (NL)) 5 March 1998 see claims 1-3,9,10; examples 3,12; tables 3,4,9 ---	1,3,4, 6-14
X	US 5 089 269 A (YAMAGUCHI MICHIMIRO ET AL) 18 February 1992 see column 19, line 50 - line 55; examples 3-3,3-10,4-4 ---	1,2, 7-10,14, 15,18
X	GB 1 461 775 A (UNILEVER LTD) 19 January 1977 see page 2, column 2, line 100 - line 118; examples 1.2 --- -/-	1,3,11, 13

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

¹ Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

30 June 1999

Date of mailing of the international search report

04/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Loiselet-Taisne, S

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/EP 99/01901

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 12290 A (COLGATE PALMOLIVE CO) 26 March 1998 see page 8, line 15 - line 22; claims 1-3; example 1 ---	1,3-6
A	EP 0 355 908 A (UNILEVER PLC ;UNILEVER NV (NL)) 28 February 1990 cited in the application see example 12 -----	

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/01901

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9808601	A	05-03-1998	US 5726138 A	10-03-1998
			US 5759969 A	02-06-1998
			AU 4300697 A	19-03-1998
			EP 0920353 A	09-06-1999

US 5089269	A	18-02-1992	JP 1238513 A	22-09-1989
			JP 2639816 B	13-08-1997
			JP 1265007 A	23-10-1989
			JP 1266846 A	24-10-1989
			JP 2700069 B	19-01-1998
			JP 1268620 A	26-10-1989
			JP 1268621 A	26-10-1989
			JP 1268622 A	26-10-1989
			JP 1125313 A	17-05-1989
			JP 2097182 C	02-10-1996
			JP 7121850 B	25-12-1995
			DE 3882906 A	09-09-1993
			DE 3882906 T	23-12-1993
			EP 0316054 A	17-05-1989

GB 1461775	A	19-01-1977	NONE	

WO 9812290	A	26-03-1998	US 5866529 A	02-02-1999
			AU 4489097 A	14-04-1998

EP 0355908	A	28-02-1990	AT 146504 T	15-01-1997
			AU 619333 B	23-01-1992
			AU 3997289 A	22-02-1990
			CA 1334321 A	14-02-1995
			DE 68927567 D	30-01-1997
			DE 68927567 T	17-04-1997
			DK 403689 A	18-02-1990
			FI 893815 A,B.	18-02-1990
			JP 2191540 A	27-07-1990
			JP 2513506 B	03-07-1996
			PT 91460 A,B	08-03-1990

BEST AVAILABLE COPY